

# ABC DOCKS



## **Aaron-Bradley Mechanical Edge-of-Dock (EOD) Levelers**

### **All Models - Standard Features - See Back for Options & Accessories**

- Deck & Lip manufactured from 3/8" thick 55,000 lb. minimum yield steel tread plate
- Full width piano hinge tube and pin provide maximum load distribution
- No lifting required
- Simple "Pull / Push" of the lever bar automatically sets the EOD into place
- Bar Lever Handle stores in the unit for safe keeping
- No back injuries or mashed fingers from handling portable dockboards
- Returns to stored position when truck departs
- Service Range of +/- 5" from dock height
- Heavy duty steel bump blocks with structural center support provide maximum impact resistance
- 2-hole, 4" x 10" x 13" molded rubber bumpers are mounted on bump blocks
- No special tools required for installation or adjustment
- Capacities: 20,000; 25,000; 30,000 and 35,000 lbs. (depending on model series)
- Model Widths: 66", 72", 78", 84" (depending on model series)
- Warranty: 1 year from date of shipment



Shown with Optional  
4 Hole Molded Bumpers  
(4 Hole Std. on 'NL')



Shown with Optional  
Steel-faced Bumpers

### **Models**

#### **'BX' & 'NL' Series**

- Extension Spring Lift Assist Mechanism
- Widths: 66" and 72" (78" & 84" 'NL' only)
- Capacities ( x 1,000 lbs.):
  - 20, 25, 30,000 'BX' & 'NL'
  - 35,000 'NL' only

#### **'BA' Series**

- Torsion Spring Lift Assist Mechanism
- Widths: 66", 72", 78" and 84"
- Capacities: 20, 25, 30 and 35,000 lbs.

**Specializing in Dock Equipment & Scissor Tables**

# Aaron-Bradley Mechanical Edge-of-Dock (EOD) Levelers

## Options




## Accessories

- 17" Lip - Designed to work with Refrigerated Trucks
- Flat Plate: For pallet jack or specialty loading cart use
- Steel face plate for bumpers
- 4-hole 4" x 12" x 13" molded rubber bumpers
- 18" bump block (vertical height)
- Unit furnished without bumpers
- Recessed units with or without pan. Furnished with standard molded or laminated bumpers (requires pit)

- Approach plates with pre-punched installation holes - Available with bend (requires notch in concrete floor) or flat & beveled (call for specifications)
- Embedded Channel: 8" x 11.5 lbs. x 120"
- Formed Angle with Bend: 1/4" x 8" x 10" x 108" x 3/8" bend

## Architectural Short Form

Bar actuated unit to be Aaron-Bradley Model [ ] BX \_\_\_\_\_ [ ] NL \_\_\_\_\_ [ ] BA \_\_\_\_\_ . To be supplied [ ] with bumpers [ ] without bumpers. Capacity to be \_\_\_\_\_,000 lbs. Unit to be \_\_\_\_\_" wide. Lip: [ ] 15" lip provides 12-3/4" lip projection with 27-3/4" working span. [ ] 17" lip provides 14-3/4" lip projection with 29-3/4" working span. Unit to automatically store upon truck departure. Mounts externally to dock face.

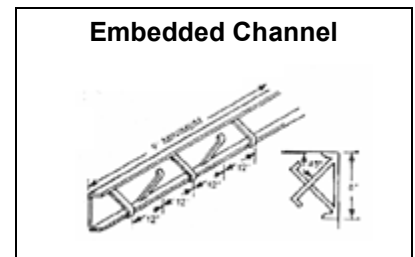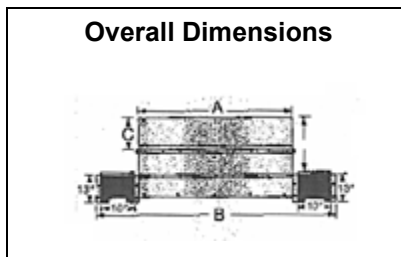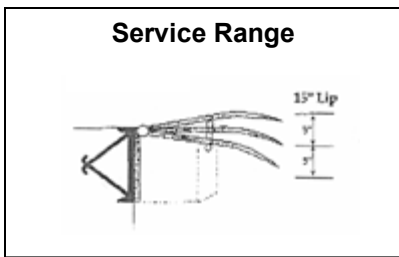


NOTE: A Flat plate unit is recommended for below dock or steep decline (consult factory). For Model number, add 'F' suffix.


Model	A	B	C
BA-BX / NL66xx	66"	96"/104"	15" / 17"
BA-BX / NL72xx	72"	102"/110"	15" / 17"
BA / NL78xx	78"	108"/116"	15" / 17"
BA / NL84xx	84"	114"/122"	15" / 17"

To help you determine the most effective and best suited installation for your particular conditions, our engineers will evaluate your operation and submit complete recommendations and cost estimates.

## OPERATING INSTRUCTIONS



Raise Bar from hanger to operate.



Pull back and down on bar until it locks in raised position.



Push bar forward to extend the lip onto the trailer.



Return the bar to the stored position.

**ABC Docks, LLC**  
**P.O. Box 1028**  
**Franklin, TN 37065-1028**  
**Ph) 800-394-5944 / 615-807-1141**  
**Fax) 615-807-1752**  
**Web: www.aaronbradley.com**  
**Email: sales@abcdocks.com**

**Distributed By:**

**Specializing in Dock Equipment & Scissor Tables**